Control Integrated POwer System (CIPOS™)

IFCM15P60GD

Datasheet

Table of contents

Table of contents **2**
CIPOS™ Control Integrated POwer System **3**
Features 3
Target Applications 3
Description 3
System Configuration 3
Pin Configuration **4**
Internal Electrical Schematic **4**
Pin Assignment **5**
Pin Description **5**
HIN(U,V,W) and LIN(U,V,W) (Low side and high side control pins, Pin 7 - 12) 5
VFO (Fault-output and NTC, Pin 14) 6
ITRIP (Over current detection function, Pin 15) 6
VDD, VSS (Low side control supply and reference, Pin 13, 16) 6
VB(U,V,W) and VS(U,V,W) (High side supplies, Pin 1 - 6) 6
N (Low side emitter, Pin 17) 6
W, V, U (High side emitter and low side collector, Pin 18 - 20) 6
P (Positive bus input voltage, Pin 21) 6
X, NX, GX (Single boost PFC, Pins 22-24) 6
Absolute Maximum Ratings **7**
Module Section 7
Inverter Section 7
Control Section 7
PFC Section 8
Recommended Operation Conditions **8**
Static Parameters **9**
Inverter Section 9
PFC Section 10
Bootstrap Parameters **10**
Dynamic Parameters **11**
Inverter Section 11
PFC Section 12
Thermistor **13**
Mechanical Characteristics and Ratings **13**
Circuit of a Typical Application **14**
Switching Times Definition **15**
Package Outline **16**
Revision history **17**

CIPOS™

Control Integrated POwer System

Dual In-Line PFC integrated Intelligent Power Module
3ϕ-bridge 600V/15A, Single phase PFC 650V/30A

Features

Package

- Dual In-Line molded module
- Lead-free terminal plating; RoHS compliant
- Very low thermal resistance due to DCB

Inverter

- TRENCHSTOP™ IGBT3
- Rugged SOI gate driver technology with stability against transient and negative voltage
- Allowable negative VS potential up to -11V for signal transmission at VBS=15V
- Integrated bootstrap functionality
- Over current shutdown
- Temperature monitor
- Under-voltage lockout at all channels
- Low side common emitter
- Cross-conduction prevention
- All of 6 switches turn off during protection

PFC

- TRENCHSTOP™ 5
- Rapid switching emitter controlled diode

Target Applications

- Home appliances
- Low power motor drives

Description

The CIPOS™ module family offers the chance for integrating various power and control components to increase reliability, optimize PCB size and system costs.

It is designed to control three phase AC motors and permanent magnet motors with single phase PFC in variable speed drives for applications like an air conditioning and low power motor drives. The package concept is specially adapted to power applications, which need good thermal conduction and electrical isolation, but also EMI-save control and overload protection.

TRENCHSTOP™ IGBT3 and anti-parallel diodes are combined with an optimized SOI gate driver for excellent electrical performance.

System Configuration

- 3 half bridges with TRENCHSTOP™ IGBT3 and anti parallel diodes
- 3ϕ SOI gate driver
- Single phase PFC with TRENCHSTOP™ 5 and Rapid switching emitter controlled diode
- Thermistor
- Pin-to-heatsink clearance distance typ. 1.6mm

Pin Configuration

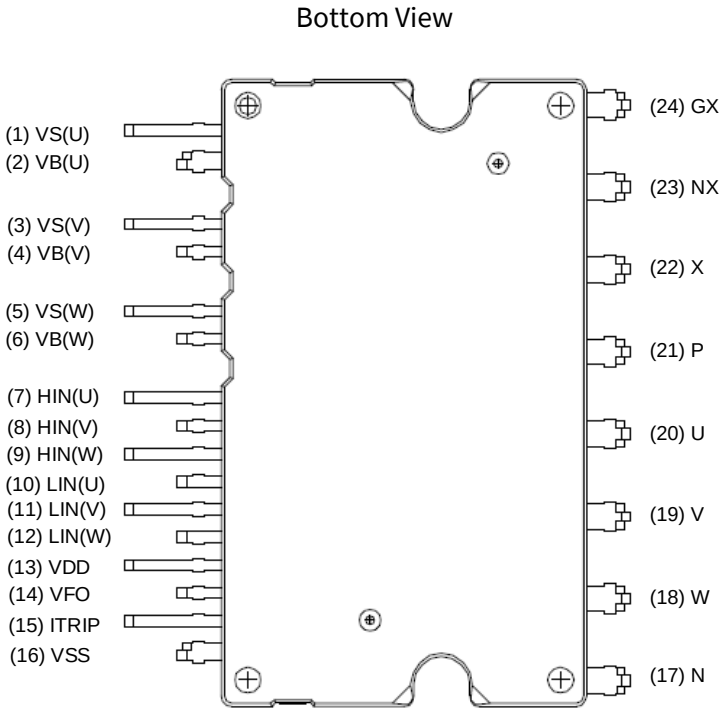


Figure 1 Pin configuration

Internal Electrical Schematic

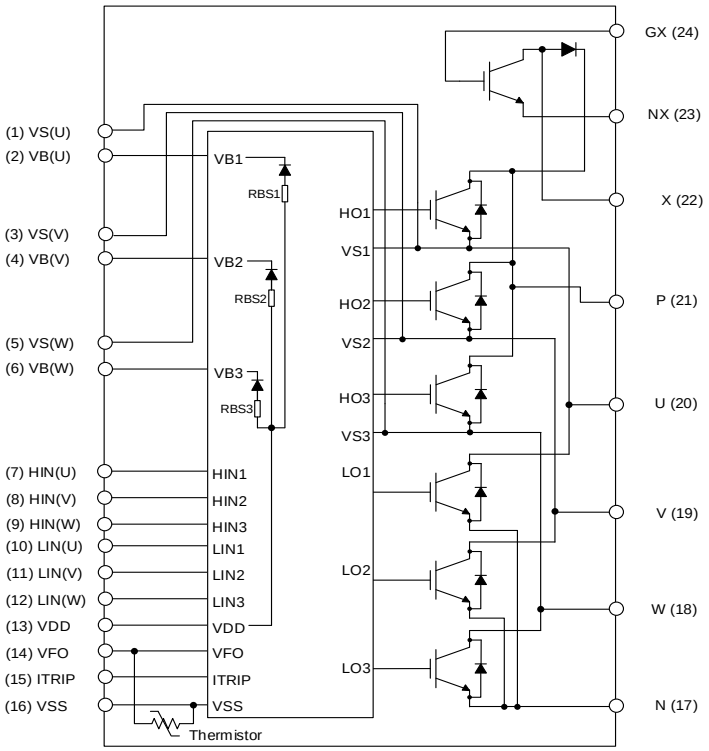


Figure 2 Internal schematic

Pin Assignment

Pin Number	Pin Name	Pin Description
1	VS(U)	U-phase high side floating IC supply offset voltage
2	VB(U)	U-phase high side floating IC supply voltage
3	VS(V)	V-phase high side floating IC supply offset voltage
4	VB(V)	V-phase high side floating IC supply voltage
5	VS(W)	W-phase high side floating IC supply offset voltage
6	VB(W)	W-phase high side floating IC supply voltage
7	HIN(U)	U-phase high side gate driver input
8	HIN(V)	V-phase high side gate driver input
9	HIN(W)	W-phase high side gate driver input
10	LIN(U)	U-phase low side gate driver input
11	LIN(V)	V-phase low side gate driver input
12	LIN(W)	W-phase low side gate driver input
13	VDD	Low side control supply
14	VFO	Fault output / Temperature monitor
15	ITRIP	Over current shutdown input
16	VSS	Low side control negative supply
17	N	Low side emitter
18	W	Motor W-phase output
19	V	Motor V-phase output
20	U	Motor U-phase output
21	P	Positive output voltage / Positive bus input voltage
22	X	PFC IGBT collector
23	NX	PFC IGBT emitter
24	GX	PFC IGBT gate

Pin Description

HIN(U,V,W) and LIN(U,V,W) (Low side and high side control pins, Pin 7 - 12)

These pins are positive logic and they are responsible for the control of the integrated IGBT. The Schmitt-trigger input thresholds of them are such to guarantee LSTTL and CMOS compatibility down to 3.3V controller outputs. Pull-down resistor of about 5kΩ is internally provided to pre-bias inputs during supply start-up and a zener clamp is provided for pin protection purposes. Input Schmitt-trigger and noise filter provide beneficial noise rejection to short input pulses.

The noise filter suppresses control pulses which are below the filter time t_{FILIN}. The filter acts according to Figure 4.

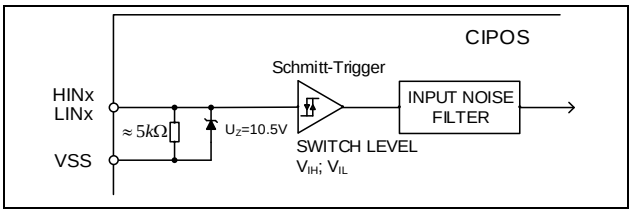


Figure 3 Input pin structure

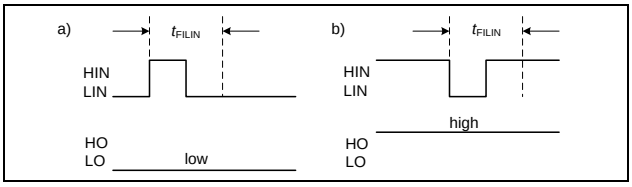


Figure 4 Input filter timing diagram

It is recommended for proper work of this product not to provide input pulse-width lower than 1.5us.

The integrated gate drive provides additionally a shoot through prevention capability which avoids the simultaneous on-state of two gate drivers of the same leg (i.e. HO1 and LO1, HO2 and LO2, HO3 and LO3). When two inputs of a same leg are activated, only former activated one is activated so that the leg is kept steadily in a safe state.

A minimum deadtime insertion of typically 380ns is also provided by driver IC, in order to reduce cross-conduction of the external power switches.

VFO (Fault-output and NTC, Pin 14)

The VFO pin indicates a module failure in case of under voltage at pin VDD or in case of triggered over current detection at ITRIP. A pull-up resistor is externally required to bias the NTC.

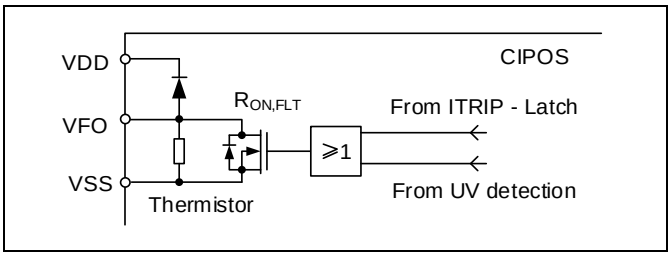


Figure 5 Internal circuit at pin VFO

The same pin provides direct access to the NTC, which is referenced to VSS. An external pull-up resistor connected to +5V ensures that the resulting voltage can be directly connected to the microcontroller.

ITRIP (Over current detection function, Pin 15)

CIPOS™ provides an over current detection function by connecting the ITRIP input with the motor current feedback. The ITRIP comparator threshold (typ. 0.47V) is referenced to VSS ground. An input noise filter (typ: $t_{ITRIPMIN}$ = 530ns) prevents the driver to detect false over-current events.

Over current detection generates a shut down of all outputs of the gate driver after the shutdown propagation delay of typically 1000ns.

VDD, VSS (Low side control supply and reference, Pin 13, 16)

VDD is the low side supply and it provides power both to input logic and to low side output power stage. Input logic is referenced to VSS ground.

The under-voltage circuit enables the device to operate at power on when a supply voltage of at least a typical voltage of V_{DDUV+} = 12.1V is present.

The IC shuts down all the gate drivers' power outputs, when the VDD supply voltage is below V_{DDUV-} = 10.4V. This prevents the external power switches from critically low gate voltage levels during on-state and therefore from excessive power dissipation.

VB(U,V,W) and VS(U,V,W) (High side supplies, Pin 1 - 6)

VB to VS is the high side supply voltage. The high side circuit can float with respect to VSS following the external high side power device emitter voltage.

Due to the low power consumption, the floating driver stage is supplied by integrated bootstrap circuit.

The under-voltage detection operates with a rising supply threshold of typical V_{BSUV+} = 12.1V and a falling threshold of V_{BSUV-} = 10.4V.

VS(U,V,W) provide a high robustness against negative voltage in respect of VSS of -50V transiently. This ensures very stable designs even under rough conditions.

N (Low side emitter, Pin 17)

The low side emitters are available for current measurements. It is recommended to keep the connection to pin VSS as short as possible in order to avoid unnecessary inductive voltage drops.

W, V, U (High side emitter and low side collector, Pin 18 - 20)

These pins are motor U, V, W input pins

P (Positive bus input voltage, Pin 21)

The high side IGBTs and PFC diode cathode are connected to the bus voltage. It is noted that the bus voltage does not exceed 450V.

X, NX, GX (Single boost PFC, Pins 22-24)

These pins are emitter, collector and gate of IGBT for single boost PFC.

Absolute Maximum Ratings

(V_{DD} = 15V and T_J = 25°C, if not stated otherwise)

Module Section

Description	Condition	Symbol	Value		Unit
			min	max	
Storage temperature range		T_{stg}	-40	125	°C
Isolation test voltage	RMS, f = 60Hz, t =1min	V_{ISOL}	2000	-	V
Operating case temperature range	Refer to Figure 6	T_C	-40	125	°C

Inverter Section

Description	Condition	Symbol	Value		Unit
			min	max	
Max. blocking voltage	I_C = 250µA	V_{CES}	600	-	V
DC link supply voltage of P-N	Applied between P-N	V_{PN}	-	450	V
DC link supply voltage (surge) of P-N	Applied between P-N	$V_{PN(surge)}$	-	500	V
Output current	T_C = 25°C, T_J < 150°C	I_C	-15	15	A
Maximum peak output current	less than 1ms	$I_{C(peak)}$	-30	30	A
Short circuit withstand time[1]	V_{DC} ≤ 400V, T_J = 150°C	t_{SC}	-	5	µs
Power dissipation per IGBT		P_{tot}	-	49.8	W
Operating junction temperature range		T_J	-40	150	°C
Single IGBT thermal resistance, junction-case		R_{thJC}	-	2.51	K/W
Single diode thermal resistance, junction-case		R_{thJCD}	-	4.67	K/W

Control Section

Description	Condition	Symbol	Value		Unit
			min	max	
Module supply voltage		V_{DD}	-1	20	V
High side floating supply voltage (VB vs. VS)		V_{BS}	-1	20	V
Input voltage	LIN, HIN, ITRIP	V_{IN} V_{ITRIP}	-1 -1	10 10	V
Inverter switching frequency		f_{PWM}	-	20	kHz
PFC switching frequency		$f_{PWM(PFC)}$	-	60	kHz

[1] Allowed number of short circuits: <1000; time between short circuits: > 1s.

PFC Section

(V_{GE} = 15V and T_J = 25°C, if not stated otherwise)

Description	Condition	Symbol	Value		Unit
			min	max	
Max. blocking voltage	I_C = 250µA	V_{CES}	650	-	V
Repetitive peak reverse voltage	I_R = 250µA	V_{RRM}	650	-	V
Gate-emitter voltage		V_{GE}	-20	20	V
Input RMS current	$T_J \leq$ 150°C, T_C = 25°C	I_i	-	30	A
Maximum peak input current	$T_J \leq$ 150°C, T_C = 25°C less than 1ms, non-repetitive	$I_{i(peak)}$	-	60	A
Power dissipation		P_{tot}	-	85.6	W
Operating junction temperature range		T_J	-40	150	°C
Single IGBT thermal resistance, junction-case		R_{thJC}	-	1.46	K/W
Single diode thermal resistance, junction-case		R_{thJCD}	-	2.76	K/W

Recommended Operation Conditions

All voltages are absolute voltages referenced to V_{SS} -potential unless otherwise specified.

Description	Symbol	Value			Unit
		min	typ	max	
DC link supply voltage of P-N	V_{PN}	0	-	450	V
High side floating supply voltage (V_B vs. V_S)	V_{BS}	13.5	-	18.5	V
Low side supply voltage	V_{DD}	14.5	16	18.5	V
Control supply variation	ΔV_{BS}, ΔV_{DD}	-1 -1	-	1 1	V/µs
Logic input voltages LIN,HIN,ITRIP	V_{IN} V_{ITRIP}	0 0	-	5 5	V
Between VSS - N and NX(including surge)	V_{SS}	-5	-	5	V
PFC IGBT gate-emitter voltage	V_{GE}	14	-	18	V
PFC IGBT external gate parameters	R_G	-	10	-	Ω
	C_{GE}	-	4.7	-	nF
	R_{GE}	-	10	-	kΩ

Static Parameters

Inverter Section

(V_{DD} = 15V and T_J = 25°C, if not stated otherwise)

Description	Condition	Symbol	Value			Unit
			min	typ	max	
Collector-Emitter saturation voltage	I_C = 10A T_J = 25°C 150°C	$V_{CE(sat)}$	- -	1.55 1.8	2.05 -	V
Emitter-Collector forward voltage	I_F = 10A T_J = 25°C 150°C	V_F	- -	1.75 1.8	2.45 -	V
Collector-Emitter leakage current	V_{CE} = 600V	I_{CES}	-	-	1	mA
Logic "1" input voltage (LIN,HIN)		V_{IH}	-	2.1	2.5	V
Logic "0" input voltage (LIN,HIN)		V_{IL}	0.7	0.9	-	V
ITRIP positive going threshold		$V_{IT,TH+}$	400	470	540	mV
ITRIP input hysteresis		$V_{IT,HYS}$	40	70	-	mV
VDD and VBS supply under voltage positive going threshold		V_{DDUV+} V_{BSUV+}	10.8	12.1	13.0	V
VDD and VBS supply under voltage negative going threshold		V_{DDUV-} V_{BSUV-}	9.5	10.4	11.2	V
VDD and VBS supply under voltage lockout hysteresis		V_{DDUVH} V_{BSUVH}	1.0	1.7	-	V
Quiescent VBx supply current (VBx only)	H_{IN} = 0V	I_{QBS}	-	300	500	µA
Quiescent VDD supply current (VDD only)	L_{IN} = 0V, H_{INX}=5V	I_{QDD}	-	370	900	µA
Input bias current	V_{IN} = 5V	I_{IN+}	-	1	1.5	mA
Input bias current	V_{IN} = 0V	I_{IN-}	-	2	-	µA
ITRIP input bias current	V_{ITRIP} = 5V	I_{ITRIP+}	-	65	150	µA
VFO input bias current	VFO = 5V, V_{ITRIP} = 0V	I_{FO}	-	60	-	µA
VFO output voltage	I_{FO} = 10mA, V_{ITRIP} = 1V	V_{FO}	-	0.5	-	V

PFC Section

(V_{GE} = 15V and T_J = 25°C, if not stated otherwise)

Description	Condition	Symbol	Value			Unit
			min	typ	max	
Collector-Emitter saturation voltage	I_C = 30A, T_J = 25°C 150°C	$V_{CE(sat)}$	- -	1.7 2.0	2.3 -	V
Diode forward voltage	I_F = 30A, T_J = 25°C 150°C	V_F	- -	1.75 1.65	2.3 -	V
Gate-Emitter threshold voltage	I_C = 0.3mA, V_{GE}=V_{CE}	$V_{GE(th)}$	3.2	4.0	4.8	V
Collector-Emitter leakage current	V_{CE} = 650V, V_{GE} = 0V	I_{CES}	-	-	1	mA
Gate-Emitter leakage current	V_{CE} = 0V, V_{GE} = 20V	I_{GES}	-	-	1	µA
Diode reverse leakage current	V_R = 650V	I_R	-	-	1	mA

Bootstrap Parameters

(T_J = 25°C, if not stated otherwise)

Description	Condition	Symbol	Value			Unit
			min	typ	max	
Repetitive peak reverse voltage		V_{RRM}	600	-	-	V
Bootstrap diode resistance	Between V_F=4V and V_F=5V	R_{BSD}	-	40	-	Ω
Reverse recovery time	I_F = 0.6A, di/dt=80A/µs	t_{rr_BSD}	-	50	-	ns
Bootstrap diode forward voltage	I_F = 0.5mA	V_{F_BSD}	-	1	-	V

Dynamic Parameters

Inverter Section

(V_{DD} = 15V and T_J = 25°C, if not stated otherwise)

Description	Condition	Symbol	Value			Unit
			min	typ	max	
Turn-on propagation delay time	$V_{LIN,HIN}$ = 5V, I_C = 10A, V_{DC} = 300V	t_{on}	-	680	-	ns
Turn-on rise time		t_r	-	30	-	ns
Turn-on switching time		$t_{c(on)}$	-	220	-	ns
Reverse recovery time		t_{rr}	-	60	-	ns
Turn-off propagation delay time	$V_{LIN,HIN}$ = 0V, I_C = 10A, V_{DC} = 300V	t_{off}	-	950	-	ns
Turn-off fall time		t_f	-	55	-	ns
Turn-off switching time		$t_{c(off)}$	-	120	-	ns
Short circuit propagation delay time	From $V_{IT,TH+}$ to 10% I_{SC}	t_{SCP}	-	1250	-	ns
Input filter time ITRIP	V_{ITRIP} = 1V	$t_{ITRIPmin}$	-	530	-	ns
Input filter time at LIN, HIN for turn on and off	$V_{LIN,HIN}$ = 0V & 5V	t_{FILIN}	-	290	-	ns
Fault clear time after ITRIP-fault	V_{ITRIP} = 1V	t_{FLTCLR}	40	-	-	µs
Deadtime between low side and high side		DT_{PWM}	1.5	-	-	µs
Deadtime of gate drive circuit		DT_{IC}	-	380	-	ns
IGBT turn-on energy (includes reverse recovery of diode)	V_{DC} = 300V, I_C = 10A T_J = 25°C 150°C	E_{on}	- -	400 490	- -	µJ
IGBT turn-off energy	V_{DC} = 300V, I_C = 10A T_J = 25°C 150°C	E_{off}	- -	190 290	- -	µJ
Diode recovery energy	V_{DC} = 300V, I_C = 10A T_J = 25°C 150°C	E_{rec}	- -	55 70	- -	µJ

PFC Section

(V_{GE} = 15V and T_J = 25°C, if not stated otherwise)

Description	Condition	Symbol	Value			Unit
			min	typ	max	
Input capacitance	V_{CE} = 25V, V_{GE} = 0V, f = 1MHz	C_{ies}	-	1800	-	pF
Output capacitance		C_{oes}	-	45	-	
Reverse transfer capacitance		C_{res}	-	7	-	
Gate charge	V_{DC} = 520V, I_C = 30A, V_{GE} = 15V	Q_G	-	70	-	nC
Turn-on delay time	V_{DC} = 400V, I_C = 30A, R_G = 10Ω, C_{GE} = 4.7nF, R_{GE} = 10kΩ, T_J = 25°C	$t_{d(on)}$	-	20	-	ns
Turn-on rise time		t_r	-	45	-	ns
Turn-off delay time		$t_{d(off)}$	-	115	-	ns
Turn-off fall time		t_f	-	30	-	ns
Reverse recovery time		t_{rr}	-	80	-	ns
Turn-on energy	V_{DC} = 400V, I_C = 30A, R_G = 10Ω, C_{GE} = 4.7nF, R_{GE} = 10kΩ T_J = 25°C 150°C	E_{on}	- -	835 1025	- -	µJ
Turn-off energy	V_{DC} = 400V, I_C = 30A, R_G = 10Ω, C_{GE} = 4.7nF, R_{GE} = 10kΩ T_J = 25°C 150°C	E_{off}	- -	315 395	- -	µJ
Diode recovery energy	V_{DC} = 400V, I_C = 30A, R_G = 10Ω, C_{GE} = 4.7nF, R_{GE} = 10kΩ T_J = 25°C 150°C	E_{rec}	- -	95 170	- -	µJ


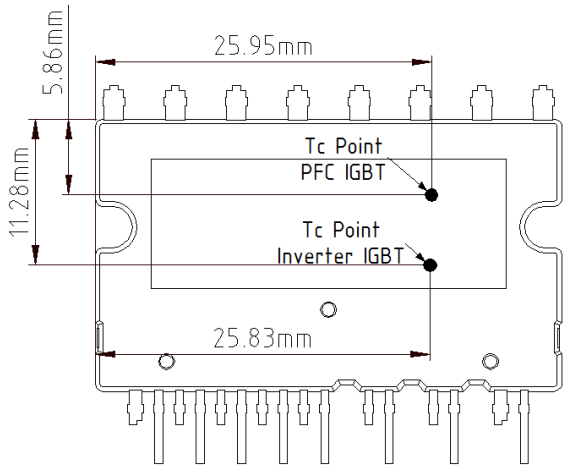


Figure 6 T_C measurement point[1]

[1] Any measurement except for the specified point in figure 6 is not relevant for the temperature verification and brings wrong or different information.

Thermistor

Description	Condition	Symbol	Value			Unit
			min	typ	max	
Resistor	T_{NTC} = 25°C	R_{NTC}	-	85	-	kΩ
B-constant of NTC (Negative temperature coefficient)		B(25/100)	-	4092	-	K

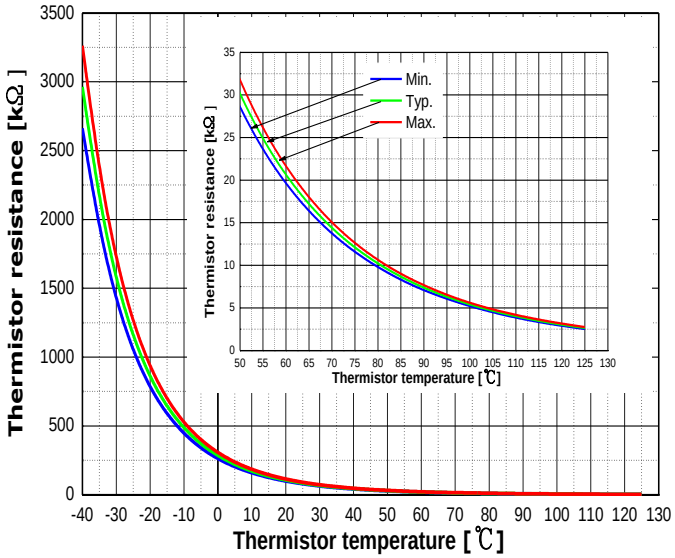

T [°C]	Rmin. [kΩ]	Rtyp. [kΩ]	Rmax. [kΩ]
50	28.400	29.972	31.545
60	19.517	20.515	21.514
70	13.670	14.315	14.960
80	9.745	10.169	10.593
90	7.062	7.345	7.628
100	5.199	5.388	5.576
110	3.856	4.009	4.163
120	2.900	3.024	3.149
125	2.527	2.639	2.751

Figure 7 Thermistor resistance – temperature curve and table

(For more information, please refer to the application note 'AN CIPOS™-Mini 1 Technical description')

Mechanical Characteristics and Ratings

Description	Condition	Value			Unit
		min	typ	max	
Mounting torque	M3 screw and washer	0.49	-	0.78	Nm
Flatness	Refer to Figure 8	-50	-	100	µm
Weight		-	6.83	-	g

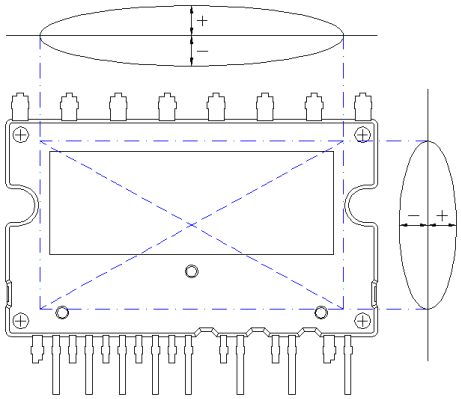


Figure 8 Flatness measurement position

Circuit of a Typical Application

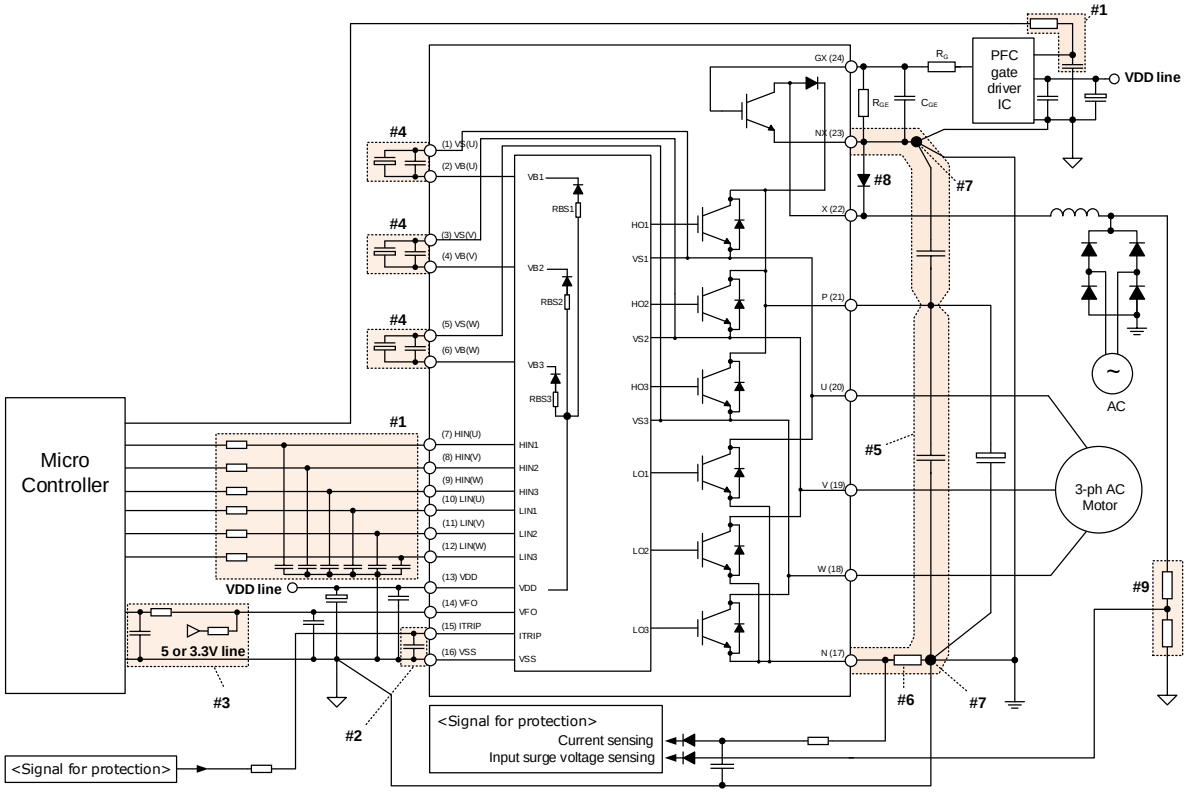


Figure 9 Application circuit

Because PFC IGBT inside this product has very high speed switching characteristics, considerable large surge voltage between P and NX terminals and switching noise on signaling path are generated easily. Please pay attention to the below items for optimized application circuit design.

1. Input circuit
   - To reduce input signal noise by high speed switching, the RIN and CIN filter circuit should be mounted. (100Ω, 1nF)
   - C_{IN} should be placed as close to VSS pin as possible.

2. Itrip circuit
   - To prevent protection function errors, C_{ITRIP} should be placed as close to Itrip and VSS pins as possible.

3. VFO circuit
   - VFO output is an open drain output. This signal line should be pulled up to the positive side of the 5V/3.3V logic power supply with a proper resistor R_{PU}. It is recommended that RC filter be placed as close to the controller as possible.

4. VB-VS circuit
   - Capacitor for high side floating supply voltage should be placed as close to VB and VS pins as possible.

5. Snubber capacitor
   - The wiring between CIPOS™ Mini and snubber capacitor including shunt resistor should be as short as possible.

6. Shunt resistor
   - Each shunt resistor of SMD type should be used for reducing its stray inductance.

7. Ground pattern
   - Each ground pattern should be separated at only one point of shunt resistor as short as possible.
   - Power ground pattern between PFC and Inverter should be connected as short as possible.

8. Anti parallel diode
   - It's mandatory to connect anti-parallel diode (2A, voltage rating higher than 650V) to PFC IGBT.

9. Input surge voltage protection circuit
   - This protection circuit is necessary for PFC IGBT to be protected from excessive surge voltage.

Switching Times Definition

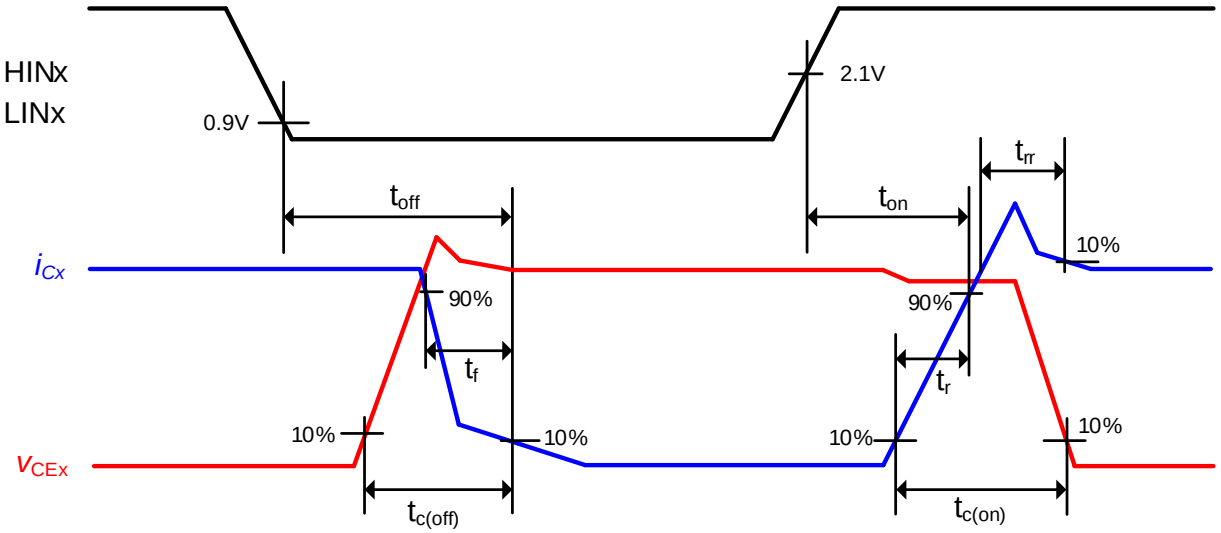


Figure 10 Switching times definition of inverter




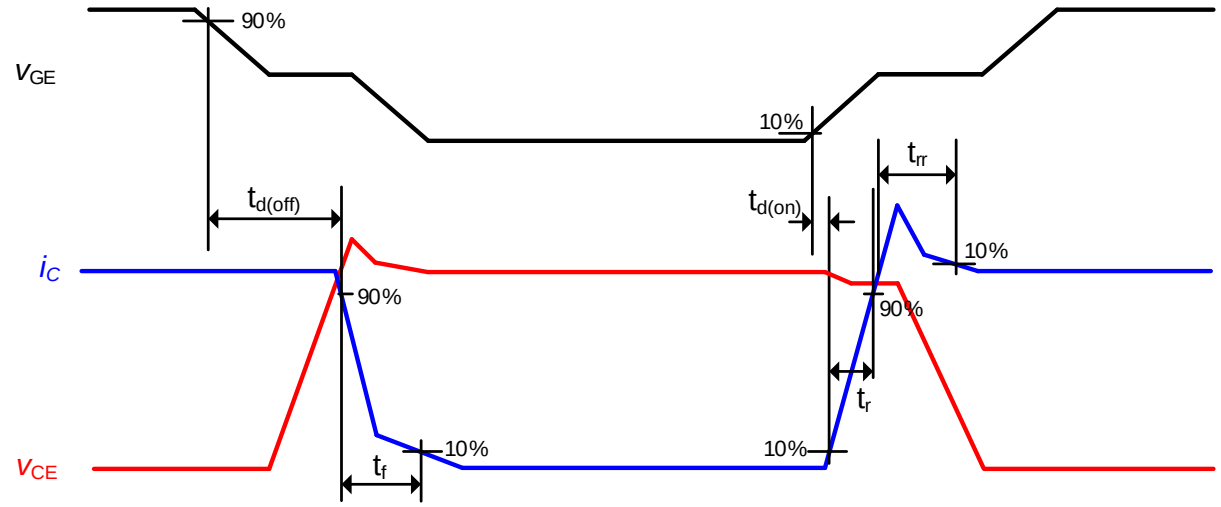



Figure 11 Switching times definition of PFC


Package Outline

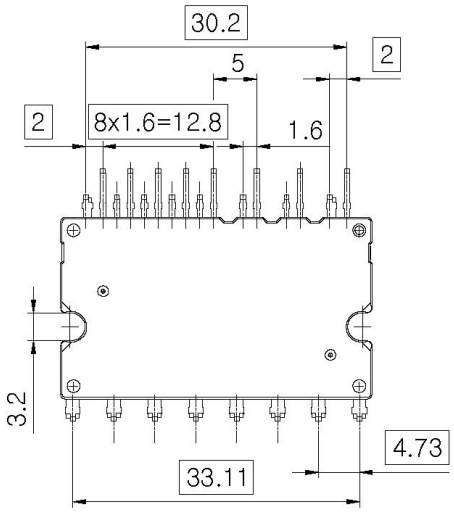

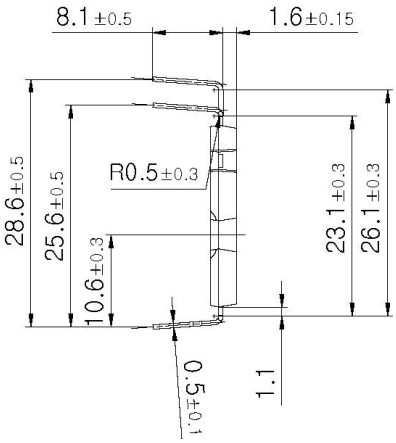

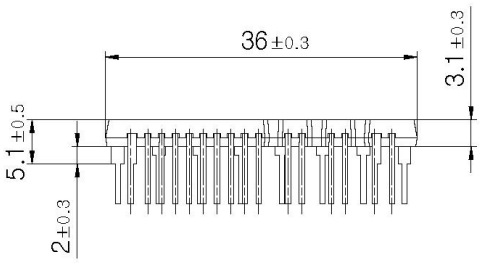

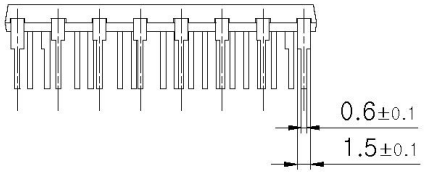

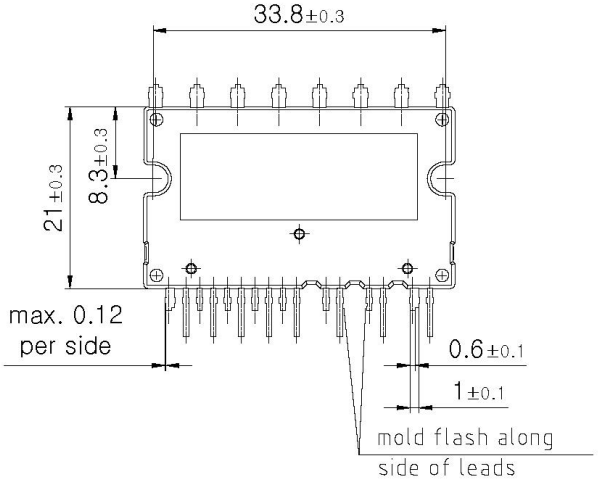

Revision history

Document version	Date of release	Description of changes
V 2.1	Aug. 2017	Package outline update Fig.9 Application circuit
V 2.2	Sep. 2017	Maximum operating case temperature, Tc= 125°C

Trademarks
All referenced product or service names and trademarks are the property of their respective owners.

Edition 2017-09-06
Published by
Infineon Technologies AG
81726 München, Germany

© 2017 Infineon Technologies AG.
All Rights Reserved.

Do you have a question about this document?
Email: erratum@infineon.com

Document reference
ifx1

IMPORTANT NOTICE
The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics (“Beschaffenheitsgarantie”) .

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer’s compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer’s products and any use of the product of Infineon Technologies in customer’s applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer’s technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

Please note that this product is not qualified according to the AEC Q100 or AEC Q101 documents of the Automotive Electronics Council.

WARNINGS
Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies’ products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.